


Technical Specification

Clip-Rail

(ACC-CR)

Rails are used for fixing pipes for radiant heating and cooling, both for wall and floor in single-family houses, public buildings, industrial buildings and sports facilities. Rails are fitted with holders, which thanks to its construction ensure easy and stable embedding pipes in diameters 15 to 20 mm. The minimum possible distance between tubes is 50 mm. With special hooks on both ends of the rail mounting rails can be combined in long lengths and can also be cut to the desired length.

The method of installation of Rails is extremely fast and easy. This system is particularly useful with large surfaces and allows the positioning system in any way, depending on the shape of the surface.

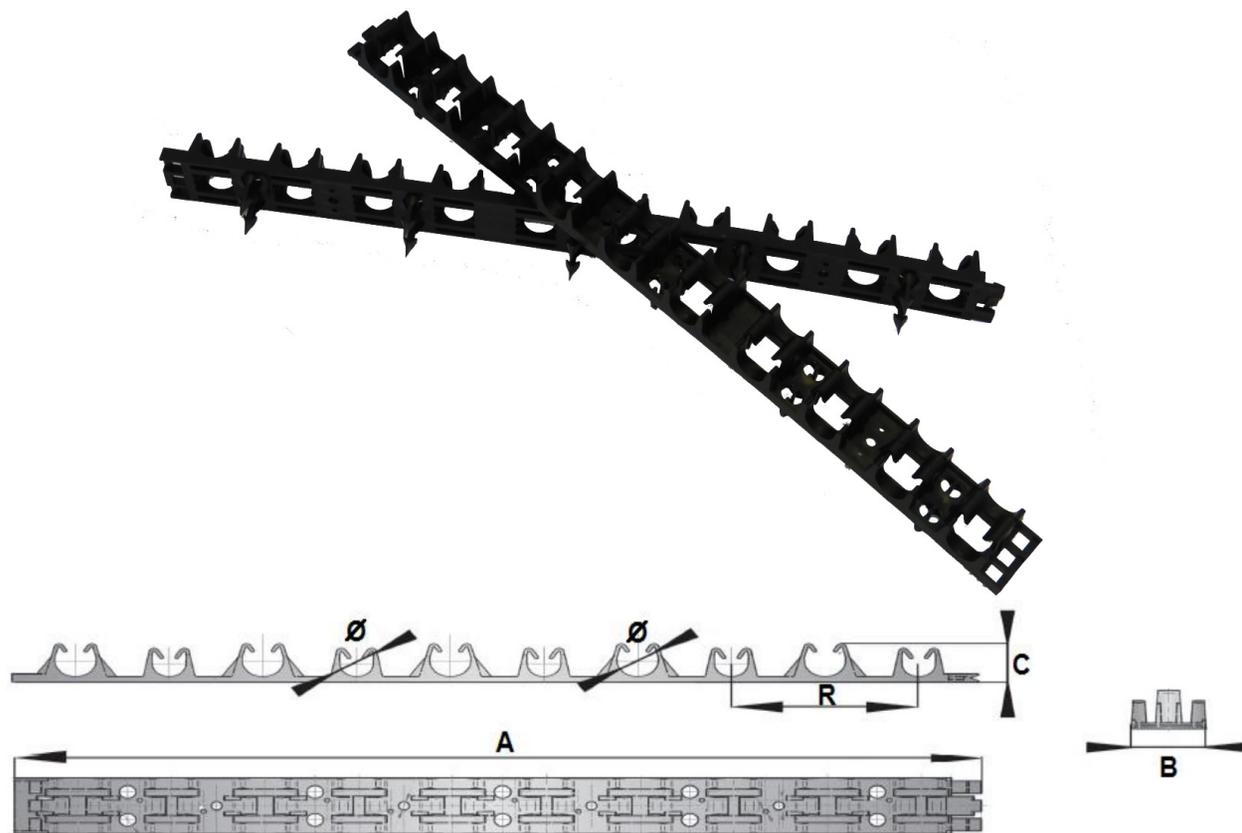

Length of single tracks A [mm]	Sale Length [mm]	Width B [mm]	Height C [mm]	Diameter of the tube holder Φ [mm]	The minimum distance between the tube R [mm]	Color
512,5	1000	40	53	15÷20	50	black