

Technical Specification

Screed Staples

(ACC-STXX)


Use of the HydroHeat staples enables quick and easy assembly of floor heating with any arrangement of heating pipes (meander and snail). According to thickness of the insulation, one adjusts to the proper type of staple. A tool for application of the staples replaces manual assembly of the floor heating pipes and provides the installer with an increased comfort of work and makes the assembly much quicker. Precise assembly enables any placement of a tube and a possibility of the fastening staples density, while guaranteeing the reliability of the assembled pipe in the system when pouring the screed.

Advantages

- material with high resistance to bending, breaking and tearing,
- the quickest and simplest method of surface heating/ cooling assembly in single- and multifamily housing development as well as large surface, sports and road objects,
- it significantly decrease time needed for surface heating/ cooling system assembly,
- it increase a fitter's comfort of work with the use of a tacker.

TECHNICAL DETAILS:

- The staples are made of polypropylene
- Welded packages
- The staples are adjusted to work with HydroHeat Tackers

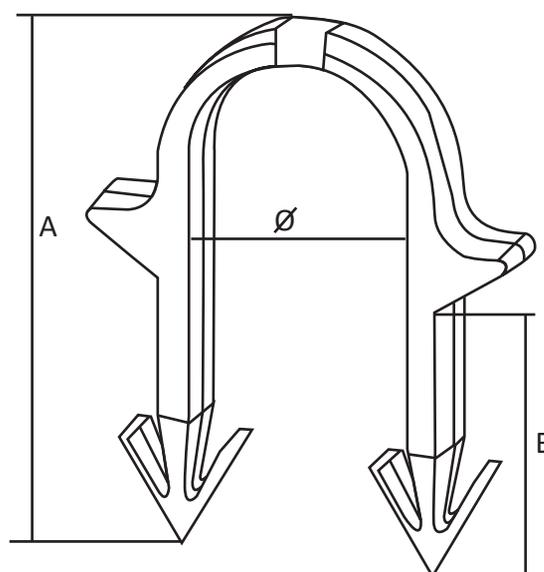

Staples size	A	B	MAX Diameter	No. of Staples Box	dimensions
40mm	40mm	20mm	20mm	300	193x165x81
50mm	50mm	30mm	20mm	250	170x154x108
57mm	57mm	37mm	20mm	300	193x165x120